Due To Printing The Relationship May Be Different From The Actual Product Color. Please Prevail In Kind. 由于印刷关系,可能与实际产品颜色有所差异,请以实物为准!





从"心"探索生活之美 EXPLORING BEAUTY OF LIFE BY HEART

 $10^{MM}/20^{MM}$  |  $5.5^{MM}/12^{MM}/15^{MM}/18^{MM}$  \*

### □ 目录

数 码   岩 板		
800x1800x10mm	800x1800x10mm	11
750x1500x10mm	750x1500x10mm	31
900x1800x15/12mm	900x1800x15/12mm	33
室内户外   一体化用砖	INDOOR AND OUTDOOR	
雕刻白	Premium white	39
黑白根	Black Marquina	43
极简灰	Mininal	45
玛雅灰	Ma Ya	49
罗曼蒂克灰	Romantic	5.3
云朵拉灰	Tundra	57
大理石   系列	MARBLE SERIES	
卡拉拉	Carrara	61
阿玛尼	Armani	63
露娜	Luna	65
普佩斯	Pulpis	67
地心石	Geocentric rock	69
洞石	Travertine	71

现代仿古	MODERN	
系 列	MATT SERIES	
法国石	Nuage	75
瓦尔斯	Vals	79
洛基山	Rocky	81
古堡	Old castle	83
欧若拉	Aurora	85
水磨石(小颗粒)	Terrazzo (Small)	87
水磨石(大颗粒)	Terrazzo (Large)	89
澳洲砂岩	Jurassic	91
尼尔石	Engineer Stone	93
孔石	Travertine	95
桑坦石	Cream sands	97
巴拿马	Panama	99
巴萨缇娜	Basaltina	101
小径、火焰	Alley & Flame	103
普罗旺斯、塞浦路斯	Provence & Cyprus	105
木纹	WOOD GRAIN	
系 列		
200/225/265x1800mm	200/225/265x1800mm	109
200x1200mm	200x1200mm	111
200x900mm	200x900mm	113
150x900mm	150x900mm	114
工程	ENGINEERING	
案 例		
部分工程案例	Engineering	115
铺贴指引	Paving Guide	143
技术参数	Technical parameters	145

-5-

## 尖端创新技术数码釉

超越品质采用全新纳米釉料十度升级,质感至简。

防滑度 🕽 柔和度 🕽 防污度 🕽 调变度 🕽 耐酸碱度 🕽



 $5.5\,\mathrm{\frac{MM}{328}}/12\,\mathrm{\frac{MM}{28}}/15\,\mathrm{\frac{MM}{28}}/18\,\mathrm{\frac{MM}{82396}}$  \*

### 吸水率 ≤ 0.1%

产品以天然陶土及绿色再生材料为主要原料,

1280℃高温煅烧而成。

具备低吸水率,多种厚度的瓷质通体砖。

专注多样化产品技术创新与应用延伸。

采用全通体技术,令砖体表里如一、致密无孔,

产品拥有破坏强度,耐磨度高,防滑性能强等优势。

全部采用一石多面工艺,多种产品面质选择。

(仿古面、酸洗面、臻炻面、柔抛面、干粒面、拉槽面、微光柔触面、半抛面、全抛面等)

### 产品应用场所:

机场、高铁、地铁、商业连锁、4S店、连锁酒店/咖啡厅、别墅群、地产中高端精装配套、停车场等。

products are mainly made of natural clay and green recycled materials.

Made by calcining at 1280°C.

Ceramic tile with low water absorption and various thickness.

focuses on technological innovation and application extension of diversified products.

The whole body technology is adopted to make the brick look the same inside and outside, compact and non-porous. products have the advantages of destruction strength, high abrasion resistance, strong skid resistance and so on.

All adopt one stone multi - faceted process, a variety of product surface quality choice.

(Archaized surface, pickling surface, Zhen Stoneware surface, touchstone surface, dry grain surface, troughing surface, low light touch surface, half surface, full surface, etc.)

### Product application places:

airport, high-speed rail, subway, commercial chain, 4S shop, chain hotel / coffee shop, villa group, medium and high-end hardbound supporting facilities of real estate, parking lot.





# DIGITAL GLAZE ROCK PLATE

数码

岩板



-9-

## 数码岩板

800x1800x10mm Digital glaze Rock plate 产品面质/ 坯体工艺/







Matt 仿古面

Full body brick 通体坯

颜色/规格/



一石 N 面 / 6 个设计面 (混图铺贴 & 无限连纹铺贴)





▲ Space Application / 空间应用: 家装别墅

-11-

### •数码岩板/

### 颜色/规格/



M88Y2582G-10 800x1800x10mm

### 一石 N 面 / 12 个设计面



▼ Space Application / 空间应用: 前台大堂




-13 -

### 颜色/规格/



一石 N 面 / 6 个设计面 (混图铺贴 & 无限连纹铺贴)

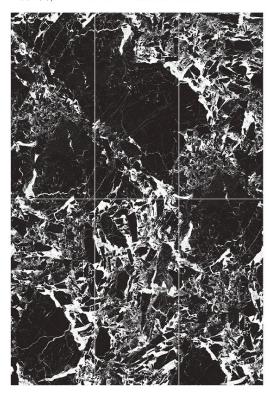



▲ Space Application / 空间应用:家装别墅

-15-


颜色/规格/




B88L1412-10 800x1800x10mm

一石 N 面 / 12 个设计面 (混图铺贴 & 连纹铺贴)



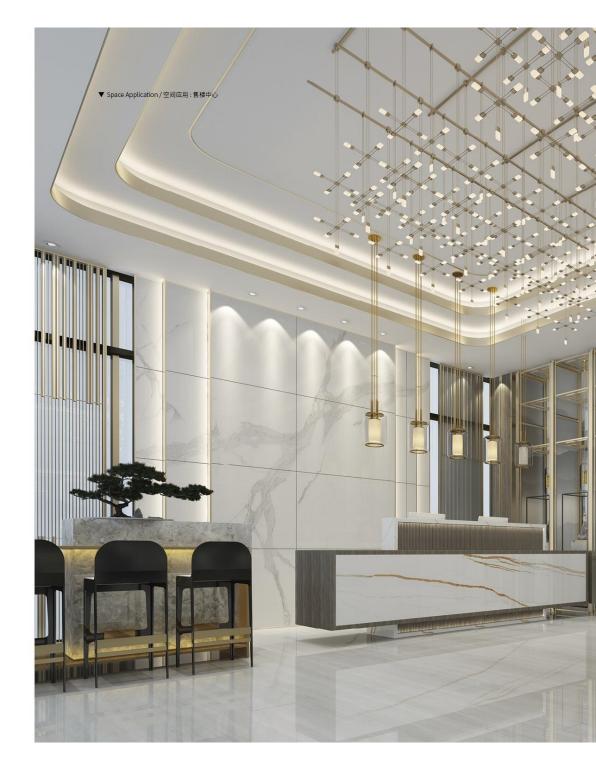

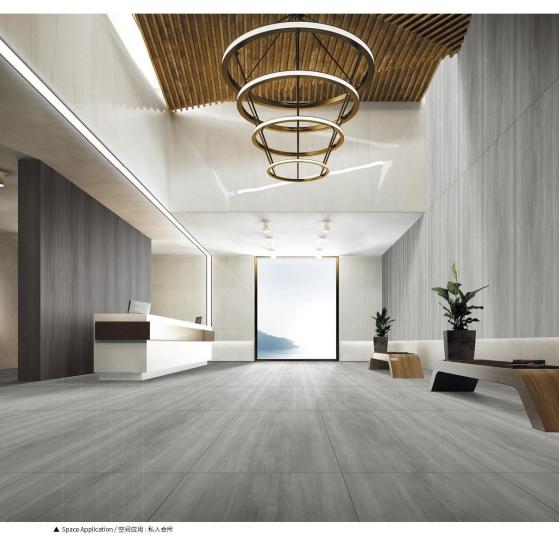



▲ Space Application / 空间应用: 岩板橱柜

颜色/规格/



- 20 -- 19 -



▲ Space Application / 空间应用: 私人会所



M88B2603TA-10 800x1800x10mm

- 21 -

M88B2605TA-10 800x1800x10mm

注:型号带\*为定制款产品,只接受客户需求定烧。



▲ Space Application / 空间应用: 休闲空间



M88B2681GA-10 800x1800x10mm




M88B2683TA-10\* 800x1800x10mm

颜色/规格/





M88B2685TA-10 800x1800x10mm





▲ Space Application / 空间应用: 休闲空间

### 颜色/规格/




M88S2192G-10 M88S2195TA-10 800x1800x10mm 800x1800x10mm

### 颜色/规格/



M88S2255T-10 M88S2256G-10 800x1800x10mm 800x1800x10mm

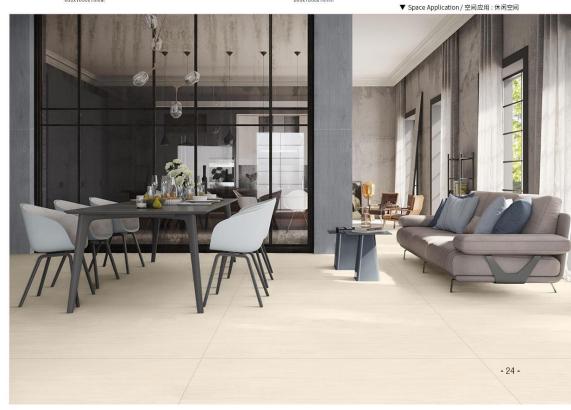

### ● 数码岩板 /



▲ Space Application / 空间应用:服装卖场

### 颜色/规格/



M88S2263G-10 800x1800x10mm

### 颜色/规格/





M88B2284G-10 800x1800x10mm

M88B2285T-10 800x1800x10mm




▲ Space Application / 空间应用:休闲别墅

- 25 -




Space Application / 空间应用: 餐桌台面 ▲

### 颜色/规格/

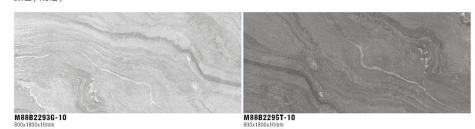

颜色/规格/

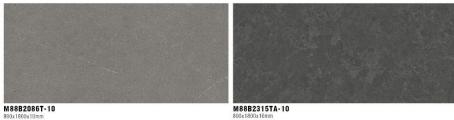


M88B2315TA-10 800x1800x10mm

Space Application / 空间应用: 休闲别墅 ▼



- 27 -- 28 -

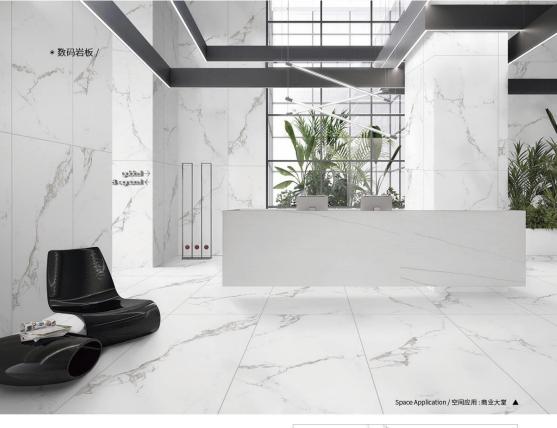





M88B2470G-10 M88B 800x1800x10mm 800x180



M88B2473T-10 800x1800x10mm

### 颜色/规格/



M0889777 10

M88B2096T-10 800x1800x10mm





M88S2275T-10 800x1800x10mm

M88S2277T-10 800x1800x10mm

▼ Space Application / 空间应用: 家装背景墙



## 数码岩板

750x1500x10mm Digital glaze Rock plate

产品面质/

坯体工艺 /





Full body brid

White body Full body brick 白坯 通体坯







颜色/规格/















## 数码岩板

900x1800x15/12mm Digital glaze Rock plate

产品面质/



仿古面





Genuine Glaze 臻炻面

Glimmering 微光柔触面

坯体工艺 /



Full body brick 通体坯




颜色/规格/



M98S2141G-15 900x1800x15mm

M98S2141G-12 900x1800x12mm



M98B2470G-15

M98B2470G-12



M98B2303T-15 900x1800x15mm

M98B2303T-12 900x1800x12mm



M98B2305T-15 900x1800x15mm M98B2305T-12 900x1800x12mm



M98B2473-15 900x1800x15mm

M98B2473-12 900x1800x12mm




M98B2477G-15

M98B2477G-12 900x1800x12mm



Space Application / 空间应用: 背景墙、餐桌、中岛台等运用 ▲




M98B2107G-15 900x1800x15mm



- 33 -- 34 -

### ●数码岩板 /



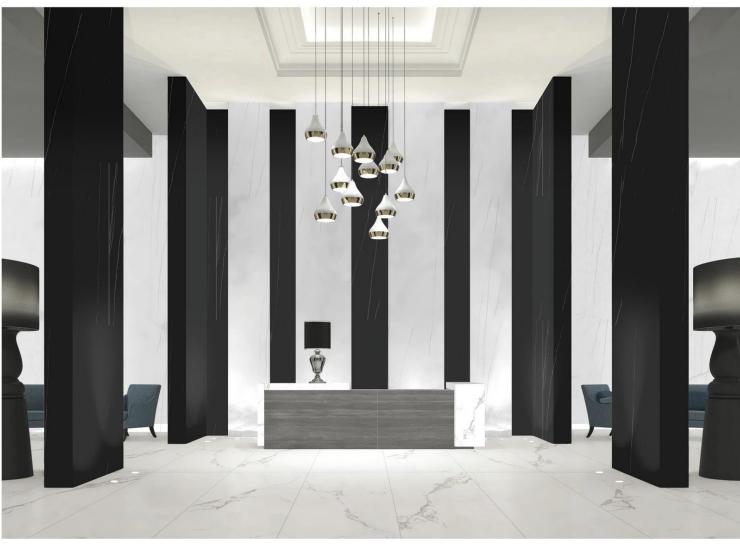

Space Application / 空间应用: 楼梯踏板 ▲ Space Application / 空间应用: 福店大堂 ▲

-36 -



# INDOOR AND OUTDOOR

室内户外 一体化用砖



-37 - - -38 -

## 雕刻白

室内户外一体化用砖 / Premium white

产品面质 /

坯体工艺 /









Full body brick 通体坯









Genuine Glaze 臻炻面









颜色/规格/












一石 N 面 / 12 个设计面 (混图铺贴 & 无限连纹铺贴)

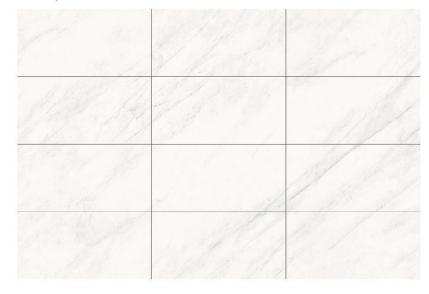

- 39 -- 40 -

### • 室内户外一体化用砖 / **雕刻白**



Soft Light 柔光细干粒面



Honed 柔抛面



Glimmering 微光柔触面



Pull Slot 拉槽面



▲ Space Application / 空间应用:商业大堂

-41 -

## 黑白根

室内户外一体化用砖 / Black Marquina

产品面质 /







Pull Slot 拉槽面

坯体工艺 /




Full body brick 通体坯



颜色/规格/









Space Application / 空间应用: 建筑外墙 🔺

### 一石 N 面 / 12 个设计面 (混图铺贴&无限连纹铺贴)



- 43 -- 44 -

## 极简灰

室内户外一体化用砖 / Minimal

产品面质 /

坯体工艺/

通体坯







柔抛面 酸洗面

Pickling

GG



Pull Slot 拉槽面 Genuine Glaze 臻炻面

Honed 柔抛面

Pull Slot 拉槽面



Silky pickling 丝滑酸洗面



Genuine Glaze 臻炻面

颜色/规格/



B62L2192G-10 600x1200x10.7mm

B62V2192G-10 600x1200x10.7mm

B62V2192GH-10 600x1200x10.7mm

B62C2192G-20 600x1200x20mm



B62L2195T-10 600x1200x10.7mm

B62V2195T-10 600x1200x10.7mm

B62V2195TH-10 600x1200x10.7mm B62C2195-20 600x1200x20mm

### 大规格数码臻炻面 /





M88S2195TA-10 800x1800x10mm



一石 N 面 / 12 个设计面 (混图铺贴 & 无限连纹铺贴)



- 45 -- 46 - 室内户外一体化用砖/极简灰

600x600mm 24\*x24\*

▼ Space Application / 空间应用: 别墅庭院





▲ Space Application / 空间应用:休闲会所

500x1200mm 241x48\*

600x600mm 24\*x24\*

-47 -

## 玛雅灰

室内户外一体化用砖 / Ma Ya

产品面质 /





Pickling 酸洗面 Silky pickling 丝滑酸洗面



Slot

Honed 柔抛面

Pull Slot 拉槽面

坯体工艺 /



Full body brick 通体坯

### 颜色/规格/



B62L2133G-10

B62V2133G-10 600x1200x10.7mm

B62V2133GH-10 B62C2133G-20 600x1200x10.7mm 600x1200x20mm



B62L2135T-10 600x1200x10.7mm

B62V2135T-10 600x1200x10.7mm



B62L2136T-10 600x1200x10.7mm

B62V2136T-10 600x1200x10.7mm

B62V2136TH-10 B62C2136-20 600x1200x10.7mm 600x1200x20mm





Silky pickling 丝滑酸洗面




Honed 柔抛面

Pull Slot 拉槽面



一石 N 面 / 12 个设计面 (混图铺贴&无限连纹铺贴)

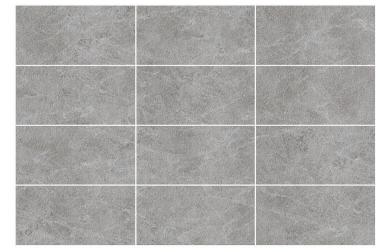

- 49 -- 50 -

### • 室内户外一体化用砖 / 玛雅灰



▲ Space Application / 空间应用:高级餐厅

B62V2133G-10 600x1200x10.7mm


B62L2133G-10 600x1200x10.7mm

600x1200mm

600x1200mm 24\*x48\*

B62C2135-20 600x1200x20mm

Space Application / 空间应用: 休闲会所 ▼

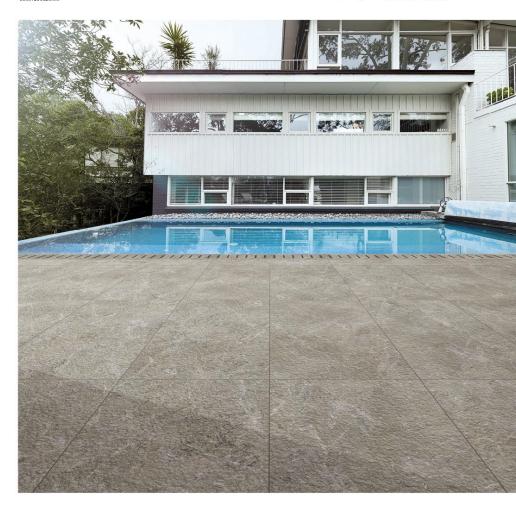

-51 -

## 罗曼蒂克灰

室内户外一体化用砖 / Romantic

产品面质/







Glaze 全抛面





Pickling 酸洗面

Silky pickling 丝滑酸洗面



Pull Slot 拉槽面

坯体工艺 /



Full body brick 通体坯

颜色/规格/



B62M2212G-10 600x1200x10.7mm B62V2212GH-10

B62L2212G-10 600x1200x10.7mm B62V2 B62C2212G-20

B62V2212G-10 600x1200x10.7mm



B62M2213G-10 600x1200x10.7mm

B62L2213G-10 600x1200x10.7mm

B62V2213G-10 600x1200x10.7mm

**B62V2213GH-10** 600x1200x10.7mm

B62V2213G-20



B62M2215T-10 600x1200x10.7mm B62V2215TH-10 600x1200x10.7mm

B62L2215T-10 600x1200x10.7mm B62C2215-20 600x1200x20mm

B62V2215T-10 600x1200x10.7mm





一石 N 面 / 12 个设计面 (混图铺贴 & 无限连纹铺贴)



-53 -

### • 室内户外一体化用砖 / 罗曼蒂克灰



-55 - - -56 -

室内户外一体化用砖 / Tundra

产品面质/

坯体工艺 /



仿古面

Matt R11 防滑面

Full body brick 通体坯



G

Honed 柔抛面

全抛面

注: 型号带\*为定制款产品, 只接受客户需求定烧。




一石 N 面 /







B60A0382-95 B60M0382-95 B62A0382-10\*















▲ Space Application / 空间应用:度假别墅



- 57 -- 58 -



## MARBLE SERIES

大理石 系列



-59 -

颜色/规格/

大理石系列 / Carrara

产品面质 /







Glaze 全抛面

B80M1382-10 800x800x10mm



B62L1382-10 B75L1382-10 600x1200x10.7mm 750x1500x10mm

坯体工艺/



Full body brick 通体坯







Space Appl ication / 空间应用: 展厅卖场 ▲





颜色/规格/



- 61 -- 62 -

## 阿玛尼

大理石系列 Armani

产品面质/

坯体工艺/ H

Honed 柔抛面


Full body brick 通体坯

颜色/规格/



B62L1322-10 B75L1322-10 600x1200x10.7mm 750x1500x10mm



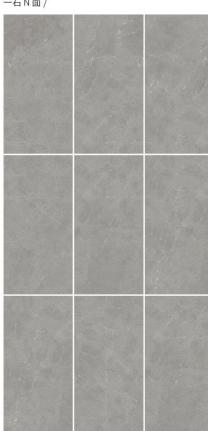



B62L1323-10 B75L1323-10 600x1200x10.7mm 750x1500x10mm



B62L1325-10 B62A1325-10 B75L1325-10 600x1200x10.7mm 600x1200x10.7mm 750x1500x10mm



B62L1326-10 B75L1326-10 600x1200x10.7mm 750x1500x10mm



▲ Space Application / 空间应用: 高档别墅





- 63 -- 64 -

## 露娜

大理石系列 /

Luna

产品面质/



Honed 柔抛面

坯体工艺 /



Full body brick 通体坯



### 颜色/规格/





▼ Space Application / 空间应用: 购物商铺





一石N面/



- 66 -

## 普佩斯

大理石系列 / Pulpis

产品面质 /



Honed 柔抛面

坯体工艺/



Full body brick 通体坯











B88L0622-10 800x1800x10mm





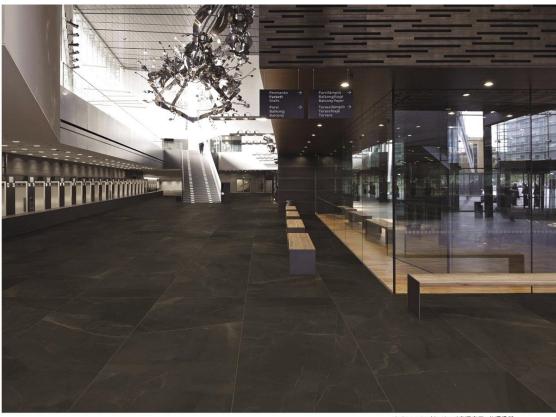

▲ Space Application / 空间应用: 休闲场所







## 地心石

大理石系列 / Geocentric rock

产品面质/



Matt 仿古面



Glaze 全抛面

坯体工艺 /



Full body brick 通体坯



颜色/规格/











▲ Space Application / 空间应用:商业办公



- 70 -- 69 -

## 洞石

大理石系列 /

Travertine

产品面质 / 坯体工艺 /





Honed 柔抛面

Full body brick 通体坯

颜色/规格/



B62L1372-10 600x1200x10.7mm



B62L1375-10 600x1200x10.7mm



B62L1373-10 600x1200x10.7mm

注:型号带\*为定制款产品,只接受客户需求定烧。



颜色/规格/



B88L1372-10\* 800x1800x10mm



B88L1375-10\*



B88L1373-10\* 800x1800x10mm



▲ Space Application / 空间应用: 休闲会所

一石N面/



- 71 -- 72 -



# MODERN MATT SERIES

现代仿古系列



-73 -

### 法国石

现代仿古系列 /

Nuage

#### 产品面质/







Pitting 凹凸麻面







防滑面

Weave 编织面

坯体工艺 /



Full body brick 通体坯

注: 型号带\*为定制款产品, 只接受客户需求定烧。



#### 颜色/规格/

B60C1856T-95 600x600x9.5mm



B62C1856T-10 600x1200x10.7mm



Pitting 凹凸麻面

Lappato

半抛面

Weave 编织面

R11 防滑面

Matt 仿古面



- 75 -- 76 -





▼ Space Application / 空间应用: 休闲会所





-77 - -78 -

### 瓦尔斯

现代仿古系列 / Vals

产品面质/ 坯体工艺 /





Full body brick

通体坯

仿古面

颜色/规格/

























B60C2366T-95 600x600x9.5mm



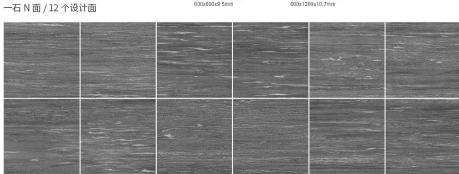



▲ Space Application / 空间应用:休闲会所





- 79 -- 80 -

现代仿古系列 / Rocky

产品面质 /

坯体工艺/





Full body brick 通体坯



仿古面

R11 防滑面




颜色/规格/















B60C2326T-95 600x600x9.5mm B60C2326-20 600x600x20mm B62C2326T-10 600x1200x10.7mm



▲ Space Application / 空间应用:高档别墅



▲ Space Application / 空间应用:商业卖场

#### 一石 N 面 / 16 个设计面



### 古堡

现代仿古系列 / Old castle

产品面质/

坯体工艺/



仿古面







▼ Space Application / 空间应用: 休闲场所



颜色/规格/








▲ Space Application / 空间应用: 商业卖场

一石N面

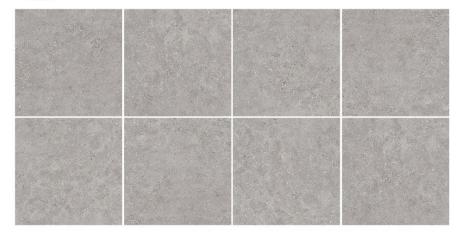

- 83 -- 84 -

现代仿古系列 / Aurora

产品面质 /

坯体工艺/



仿古面



通体坯



Lappato 半抛面




颜色/规格/


























B75A1653T-10 B75E1653T-10


B75A1655T-10

B75E1655T-10 750x1500x10mm

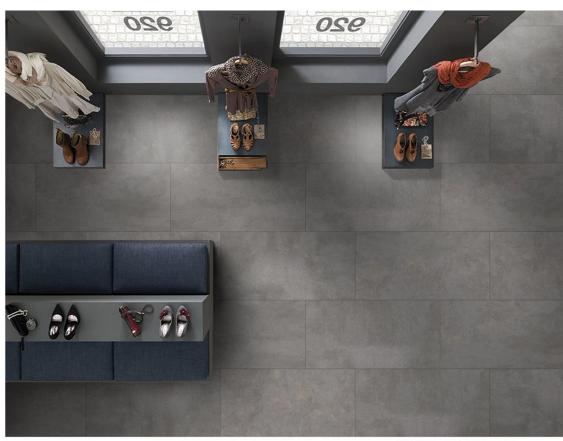

▲ Space Application / 空间应用:服装卖场

#### 一石 N 面 / 12 个设计面

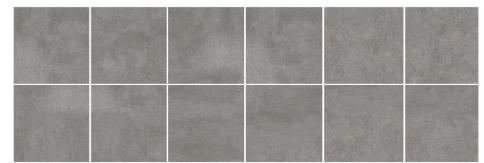

- 85 -- 86 -

### 水磨石(小颗粒)

现代仿古系列 /

Terrazzo (Small)

产品面质 / 坯体工艺 /






Matt 仿古面

Full body brick 通体坯




颜色/规格/







一石N面

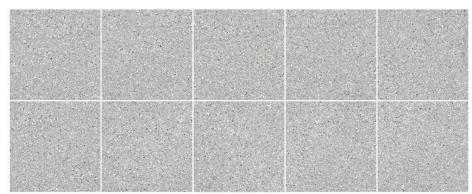

注:型号带\*为定制款产品,只接受客户需求定烧。



▼ Space Application / 空间应用: 购物商场



-87-

### 水磨石(大颗粒)

现代仿古系列 /

Terrazzo (Large)

产品面质/ 坯体工艺/





Matt 仿古面


Full body brick 通体坯




R11 防滑面



一石N面

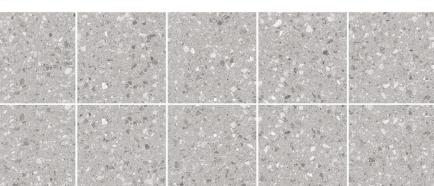

颜色/规格/



B60C1983-20





B60A1985T-95 600x600x9.5mm

B60C1985-20 600x600x20mm






B60C1987-20 600x600x20mm

B62A1987T-10 600x1200x10.7mm



▲ Space Application / 空间应用:产业园

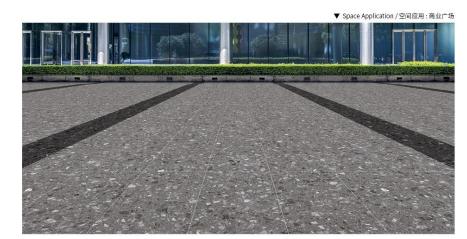

- 89 -- 90 -

### 澳洲砂岩

现代仿古系列 / Jurassic

产品面质 /

坯体工艺 /

Full body brick

通体坯



R11



Matt 防滑面



Lappato






一石 N 面 / 12 个设计面

- 91 -





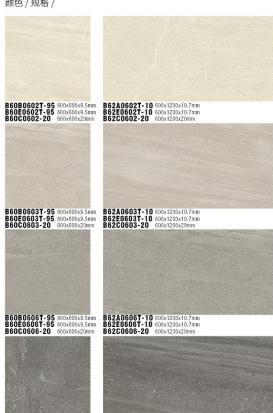









### 尼尔石

现代仿古系列 /

Engineer Stone

产品面质 / 坯体工艺 /






Matt 仿古面

Full body brick 通体坯



Pull Slot 拉槽面



颜色/规格/







B60C2413T-95 600x600x9.5mm










B60C2416T-95 600x600x9.5mm

B60C2416TH-95 600x600x9.5mm





#### 一石 N 面 / 8 个设计面

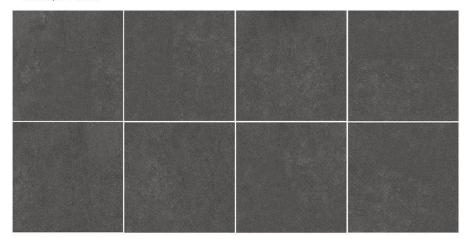

- 93 -- 94 -

### 孔石

现代仿古系列 /

Travertine

产品面质/

坯体工艺/





Full body brick 通体坯



R11 防滑面

#### 颜色/规格/



B60B2341T-95 600x600x9,5mm B60C2341T-95 600x600x9.5mm B60C2341-20 600x600x20mm



B60B2342T-95 B60C2342T-95 600x600x9.5mm B60C2342-20 600x600x20mm



B46C2342-20 400x600x20mm



B60B2344T-95 B60C2344T-95 600x600x9.5mm B60C2344-20 600x600x20mm



B46C2344-20 400x600x20mm

#### ▼ Space Application / 空间应用: 高档别墅





▲ Space Application / 空间应用: 休闲场所

一石 N 面 /18 个设计面



- 95 -- 96 -

### 桑坦石

现代仿古系列 / Cream sands

产品面质 / 坯体工艺 /



Full body brick 通体坯



颜色/规格/





B46C2351-20 400x600x20mm



B60B2352T-95 B60C2352T-95 600x600x9.5mm B60C2352-20 600x600x20mm

B60B2351T-95 600x600x9.5mm

B60C2351T-95 600x600x9.5mm

B60C2351-20 600x600x20mm



B46C2352-20 400x600x20mm




B60B2356T-95 B60C2356T-95 600x600x9.5mm B60C2356-20 600x600x20mm



B46C2356-20 400x600x20mm

#### 一石 N 面 /18 个设计面

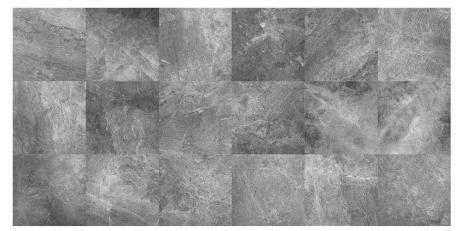



Silver 400x600x20mm ▲ Space Application / 空间应用: 高档别墅

400x600mm 12\*x24\*

- 97 -- 98 -

# 巴拿马

现代仿古系列 / Panama

产品面质 /



Matt 仿古面

坯体工艺/



Full body brick 通体坯



一石 N 面 /16 个设计面











B60C2335T-95 600x600x9.5mm



B60C2336T-95 600x600x9.5mm





- 99 -

### 巴萨缇娜

现代仿古系列 / Basaltina

产品面质 /





通体坯

坯体工艺 /

Matt 仿古面

Lappato 半抛面



R11 防滑面



颜色/规格/





B60A0741T-95 600x600x9.5mm B60E0741T-95

B60A0742T-95 600x600x9.5mm B60E0742T-95






B60A0743T-95 600x600x9.5mm B60E0743T-95 600x600x9.5mm

B60A0747T-95 600x600x9.5mm B60E0747T-95 600x600x9.5mm










-:-111111111111111111111111111111-:-

▲ Space Application / 空间应用: 游泳池

#### 一石 N 面 /

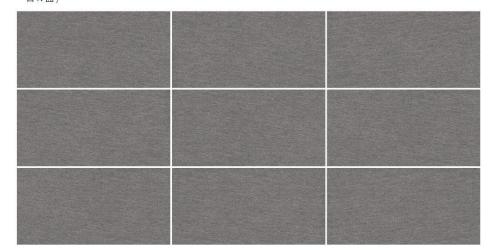

- 101 -- 102 -

# 小径、火焰

现代仿古系列 / Alley&Flame

产品面质 /







Matt 仿古面



Full body brick 通体坯



B60A0705T-95 600x600x9.5mm

小径/

B60A0702T-95 600x600x9.5mm





B62A1631T-10 600x1200x10.7mm



B62A1632T-10 600x1200x10.7mm




B62A1635T-10 600x1200x10.7mm



▲ Space Application / 空间应用: 购物商铺





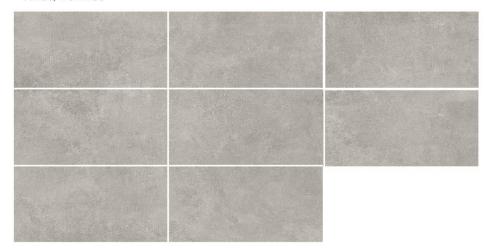

- 103 -- 104 -

### 普罗旺斯、塞浦路斯

现代仿古系列 /

Provence Cyprus

产品面质/

坯体工艺/







仿古面



普罗旺斯 /



B62A2392-10 B62E2392-10



B62A2395-10 B62E2395-10



B62A2396-10 600x1200x10.7mm B62E2396-10 600x1200x10.7mm

塞浦路斯 /



D62A2402-10 D62E2402-10



D62A2405-10 D62E2405-10



D62A2406-10 600x1200x10.7mm D62E2406-10 600x1200x10.7mm



一石 N 面 / 6 个设计面



- 105 -- 106 -



# GRANITE SERIES

木纹砖 系列



- 107 -

### 木纹砖

Wood grain

厚度/

产品面质 /








Matt 仿古面

Baby skin 缎光釉面

#### 颜色/规格/200x1800mm/265x1800mm/225x1800mm



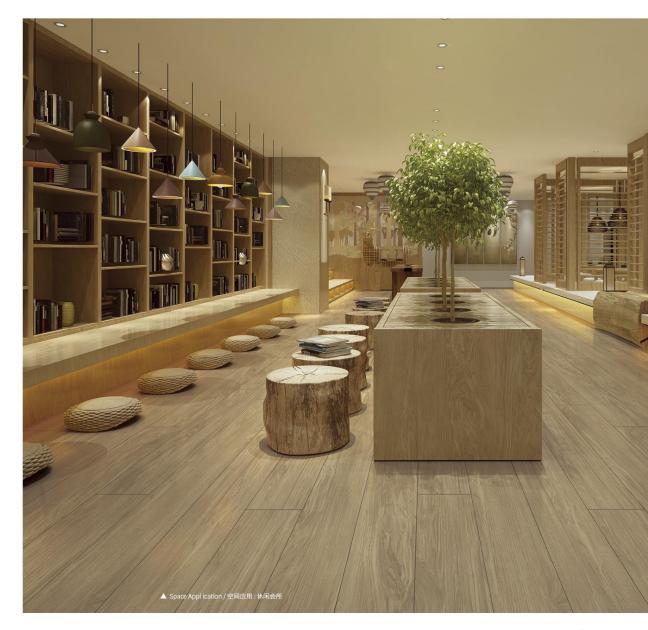

- 109 -- 110 -

#### • 木纹系列 /



▲ Space Application / 空间应用: 工作室

210048 200x1200x10mm

#### 颜色/规格/ 200x1200mm



-111 -

#### • 木纹系列 /



▲ Space Application / 空间应用: 休闲办公

#### 颜色/规格/ 200x900mm



#### 颜色/规格/150x900mm



▼ Space Application / 空间应用: 临街商铺





# ENGINEERING CASE

工程案例



- 115 -

岩石厚板(澳洲)工程案例

项目类别: 高档别墅

应用产品: B60E0607T-20 B60B0385-20 B60C1853-20

项目地点: 澳大利亚墨尔本







在世界九大豪宅湾区之一 ——墨尔本维多利亚港, 全球优秀开发商之一 Lend Lease,以打造悉尼歌剧院、吉 隆坡双子塔的专注,倾力呈现世 界九大豪宅湾。







岩石厚板(日本)工程案例

项目类别: 地铁站

应用产品: SRS-PCT006-1109

D62C1963-20 D62C1976-20 MD33T01 MD33Y01

项目地点: 日本东京 品川新站











-117-











项目类别: 办公大厦

应用产品: D60A1830G-20 D60A1837G-20

项目地点:韩国汉城





星巴克全国连锁店 项目类别:商业空间 应用产品:萨兰特全品牌

**应用产品**: 萨兰特全品版 项目地点: 全国













- 119 -





金科地产——荣昌礼悦东方 项目类别:房地产

应用产品: B60C0803-20

项目地点: 重庆





金科地产——广州集美御峰 项目类别: 商业空间 应用产品: D60C0735-20 D62A0381-20 B62A0385-20

**项目地点:** 广东







龙湖地产——厦门翔安时代上城

项目类别: 房地产

应用产品: D60C0813-20 D62C2012G-20

B62C19635-20

项目地点:福建厦门







龙湖地产 - 贵阳九里晴川

项目类别: 房地产

应用产品: B60C1852-20 D62C1997-20


项目地点:贵州贵阳







-121 -

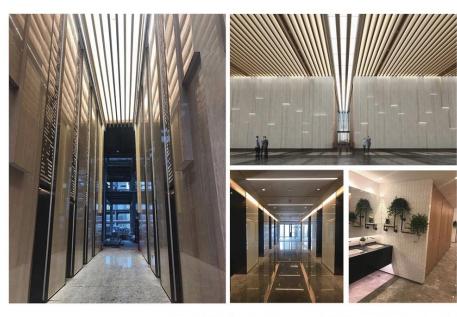

北京中国人寿金融区 Z13 项目

项目类别:商业空间 应用产品: B60C1863-20 项目地点: 北京









#### 常州路劲城市印象

项目类别: 房地产

应用产品: B62C0812-20 B60C0735-20 B60C0727-20

项目地点: 江苏

















- 123 -





重庆东原世界时 项目类别:商业空间

应用产品: B60C1863-20

项目地点: 重庆















#### 重庆蔡家东原

项目类别:商业空间

应用产品: B60C0735-20 B60C0803-20 B60C0727-20

项目地点: 重庆











重庆江山樾

项目类别:商业空间

应用产品: B60C0735-20

B60C0803-20 B60C0727-20

项目地点: 重庆





- 125 -

重庆中央公园

项目类别:商业空间

应用产品: D60C1852-20 D62C1997-20 项目地点: 重庆















#### 重庆天蓬悦府

项目类别: 房地产

应用产品: D62C2012G-20 D62C1955-20

D62C1997-20

项目地点: 重庆

















#### 旭辉江山云出

项目类别:商业空间

应用产品: D62C1897-20 D62C1872G-20

项目地点: 重庆





#### 重庆龙湖开元

项目类别:商业空间 项目地点: 重庆

应用产品: B60C0735-20 B60C0803-20 B60C0727-20











- 127 -- 128 -











重庆东方集美 项目类别: 房地产 应用产品: D62C1863-20 项目地点: 重庆



#### 宜宾金科地产

**项目类别:**房地产 **项目地点:**四川 应用产品: D62K1993G-20 B62C1863T-10

B62C1863T-10 B62C1867T-10















- 129 -





#### 成都华润万象城

项目类别:商业空间


应用产品: D62E1897-20 D62E1963-20

D62C1933-20

D62C1897-20

D62C1976-20

项目地点:四川成都

















成都禧瑞锦江东区 项目类别: 房地产 应用产品: B60C0803-20 B60C0735-20 B60C0727-20

项目地点:四川

#### 新希望地产

项目类别: 房地产

应用产品: B60C0727-20

项目地点:四川











- 131 -- 132 -





#### 涵江联发尚书第

项目类别:商业空间

应用产品: D62C1955-20 B62C0817-20

项目地点:福建福清











#### 眉山竹艺中心

项目类别:商业空间

应用产品: D60A1830G-20 D60A1832-20 项目地点:四川









#### 四川自贡邦泰熙贡府

项目类别: 房地产

应用产品: B60C0735-20

B60C1867-20

项目地点:四川

#### 四川保利堂悦府

项目类别: 房地产

应用产品: D62C1997G-20

项目地点:四川












- 133 -- 134 -



#### 湖北随州交投 金科府

项目类别:房地产

应用产品: D62K1993G-20

项目地点:湖北



#### 长沙泰禾影城

项目类别:商业空间

应用产品: B60C0817-20

项目地点:湖南











#### 湖南长沙运达房地产

项目类别: 地下停车场

应用产品: CT-1 蓝色

CT-2 黄色 CT-3 咖色 CT-4 白色

项目地点:湖南













项目类别: 房地产

应用产品: D62K1993G-20

项目地点:湖北











- 136 -

洛阳市宜阳县 玫瑰园别墅群

项目类别: 房地产

应用产品: B62C0602-20

**项目地点:** 河南













河北省保定市雄安新区

项目类别: 外墙干挂


应用产品: D62C2012G-20 D62C1997G-20

项目地点:河北











杭州桃李春风石英石

项目类别:园林

应用产品: B60C0735-20 B60C0727-20

项目地点:浙江











- 137 -- 138 -

#### 抚州铜锣湾广场

项目类别:商业空间

应用产品: GN2636、GN2654

项目地点: 江西

















项目类别:商业空间

应用产品: B62V2192G-10 B62L2215T-10

B62A1655T-10

项目地点:西藏自治区拉萨市













- 139 -

临沂吾悦广场

项目类别: 商业空间 应用产品: B62C0812-20

项目地点: 山东





#### 厦门嚐囍餐厅

项目类别:商业空间

应用产品: B62L1325-10 B62L0333-10

项目地点:福建











#### 郓城大学城

项目类别: 房地产

应用产品: B62C0602-20 B60C0602-20

项目地点: 山东









商业空间

应用产品: B62A0602T-95 B62E0602T-95

项目地点: 福建

- 141 -

### **INSTALLATION INSTRUCTIONS (INDOOR)**



1、选择合适的工具(用于安装的凹槽泥铲、吸盘和跨垫片、用于 灌浆的橡胶泥铲)至关重要。

1. Choosing the proper tools and implements(notched trowel rubber mallet, suction-cups and cross-spacers for instal ngt les, rubber trowel forgrouting)is oftheutmost importance.



2、要平铺的基材(墙壁或地板)必须完全平整,在平面上没有缺陷。 我们建议潮湿的地方事先防水。粘结层厚度的不同会对瓷砖表面 产生不同的应力,从而导致瓷砖边缘的凸出。

2. The substrate(wall or floor) to be tiled must be perfectly level, with no defects in planarity.We recommend that damp areas be waterproofed beforehand. A difference in thickness in the adhesive layer wilproduce different stresses on the ceramic tile surface which will result in projecting tile edge



3、瓷砖表面必须完全没有灰尘或仟何其他可能影响瓷砖附着力的 物质。这将提高胶粘剂在基材上的粘结强度。

3. The surface to be tiled must be completely free of dust or any other substance that could negatively affect tile adhesion. This will promote better bondingstrength of the adhesive on the substrate.



4、在安装过程中,应该有足够的光线让我们容易发现任何类型的 缺陷,特别是突出瓷砖边缘的外观。在这个阶段,工作应该用更 多的照明来完成,而不是在工作完成后照亮该区域。聚光灯的使 用将证明有助于这方面。

 During installation, there should be enough light to allow us to easily spot any sort of defect, especially the appearance of projecting tile edges. During this phase, work should be performed with more lighting than that which williluminate the area once the work is finished. The use of spotlights willprove helpfuln this regard.



5、选择使用的胶粘剂类型是基础。我们必须考虑瓷砖的基材的特 性(砖、木、石膏、金属等的表面),以及所选瓷砖的特性(多孔 墙砖、炻瓷砖或瓷砖)。

5. Selecting the type of adhesive to use is fundamental. We must take into account the properties of the substrate to be tiled(surface of brick, wood, plaster, metal, etc.), as well as the characteristics of the chosen ceramic tiles(porous wall tiles, stoneware tiles or porcelain tiles).



6、建议薄床安装方法,采用柔性胶粘剂。对于大于 31.6×31.6(1.000cm2) 的规格,建议采用浮脱技术,即在基板和 砖的背面都涂上粘合剂。

6. The thin-hed installation method is recommended, with a flevible adhesive For formats larger than 31.6×31.6(1.000cm2) the buttering-floating technique is recommended, that consists of applying the adhesive on both the substrate



7、由于这些都是经过矫正的瓷砖,所以需要小心处理,以避免在 瓷砖表面刮伤边缘、剥落或划痕。瓷砖指南\*建议瓷砖的接缝宽 度不要小干 1.5 毫米。之间的部分。

7. Being as these are rectified tiles, they require careful handing, to avoid nipped edges, chipping or scratches on the surface of tiles. The Ceramic Tile Guide\*recommends that tiles not be installed with a joint width less than 1.5 mm. Between pieces.



8、对于整流材料的安装,建议跨垫片至少为 1mm 被使用。在乡 村模型中,建议的最小接缝为3mm。当矩形瓦交错布置时,建 议每隔 3/4 块安装。

8. For the installation of rectified materials, it is recommended that cross-spacers of atleast 1mm.be used.in rustic models the minimum joint recommended is3mm...It is recommended that rectangular tiles, when arranged in a staggered layout, be installed at 3/4th-piece intervals.



9、安装停工时,要记住,已经安装的瓷砖已经收缩,我们将要安 装的瓷砖也会收缩。因此, 预测可能的移动是必要的, 因为如果 我们继续在同一水平上铺砖, 随后的收缩可能会导致水平上的轻 微差显。

9. During installation stoppages, it should be kept in mind that the tiles already installed have contracted, and those which we are going to install will experience the same movement. Therefore, it is necessary to predict the possible movement, since if we continue tiling on the same level ,the subsequent contraction may give rise to a slight difference in level.



10、建议您考虑加入周边关节,这将有助于吸收任何活动后,安装。 这些接缝必须是空的,或者用可压缩材料填充;这些接缝的最小 推荐宽度为8毫米。这种接缝是隐藏在踢脚板或瓷砖本身。

 It is recommended that you consider the inclusion of perimeter joints, which will help to absorb any movements after installation. These joints must be left empty, or else filled with a compressible material: the minimum mmended width for those joints is 8mm. This joints is concealed with the skirting or with the tile itself.



11、如果衬底已经有自己的关节结构关节或分裂,这些流砖时应 尊重安装,必须记得最大的表面积覆盖着瓷砖没有分裂的关节是 50 m² 70 m² 内饰和外饰的一半大小。

11. If the substrate already has its own structural joints or dividing joints, these should be respected when ceramic tiles are install de.lt must be remembered that the maximum surface area to be covered with ceramic tiles without dividing joints is 50 m2 to 70 m2 for interiors and half that size for exteriors.



12、在安装阶段,在设置完全完成之前,我们应该不断检查已经 安装的部件,因为还有时间来修复任何故障。橡皮锤可以用来敲 下突出的瓷砖,吸盘可以用来拉起多余的瓷砖。

 During the installation phase, before setting has fully taken place, we should continuously check already installed pieces, since there is stilltime to fix any faults. A rubber mallet can be used to tap down projecting tiles and a suctioncup can be used to pull up pieces that are sunkenn excess



13、灌浆前应确保砖与砖之间的安装缝空, 无粘结材料, 无污垢、 尘垢。任何中间物质除了阻碍浆液的粘附外,还可能使安装接缝 的效率降低。

Before grouting, it should be made sure that installation joints (between tile and tile) are empty and free of bonding materials and traces of dirt and grime.Any intermediary substance may make installation joints less effective, in addition to hindering the adhesion of the grout.



14、瓷砖牢固地粘接在基板上后,接缝处应灌浆。对于地砖的特 殊情况,应遵循制造商的建议,以便在地砖被行走或受到任何荷 载之前有足够的时间过去。

14. Joints should be grouted once tiles are firmly bonded to the substrate. In the special case of floor tiles, the manufacturer' S recommendations should be bllowed, so as to enable enough time to elapse before tiles are walked on or subjected to any loads.



15、灌浆材料应使用橡胶镘刀,并应避免使用金属镘刀,因为它 们可能损害瓷砖的釉面。市场上有各种颜色的灌浆,这使得它可 以匹配任何设置创建的阴影。

15. The grouting material should be applied with a rubber trowel, and the use of metallic trowels should be avoided at all times, since they may damage the glazed surface of tiles. Grouts in a wide range of colours are available on the market, which make it possible to match the shade of any setting created. 16、清除多余的灌浆材料应使用湿润的海绵进行。这一操作应及



时进行,因为如果灌浆材料与瓷砖的釉面接触时间过长,就会妨 碍清洁,特别是在那些表面有浮雕的型号中。 16. Removing excess grouting material should be performed using a sponge dampened in water. This operation should be done in timely fashion, since if the grouting material is left in contact with the glazed surface of tiles for too long, it inders cleaning, especially in those models the surface of which has relief



17、在建筑工程完成之前,由于研磨材料的存在和工具的不断移 动,已经安装好的陶瓷地砖必须用正确的方法加以保护,以防止 可能的损坏。这不仅有助于保护瓷砖,也将使后续清洗更容易。

17. It is absolutely necessary that already installed ceramic floor tiles be protected with the proper means so as to prevent possible damages until the building project is complete,due to the presence of abrasive materials and ongoing movement of tools. This will not only help to protect tiles, but it will also make subsequent cleaning easier.



18、应避免使用含有氢氟酸 (HF) 的清洗剂和带有可能擦伤瓷砖表 面颗粒的固体洗涤剂。氢氟酸会彻底去除瓷砖釉面,造成无法弥 补的损害。

18. The use of cleaning agents that contain hydrofluoric acid (HF) and solid detergents with particles that may abrade the tile surface should be avoided Hydrofluoric acid would completely remove the glazed surface of tiles, thus causing irreparable damage.

### **INSTALLATION INSTRUCTIONS (OUTDOOR)**

安装指导 (户外)



1、安装瓷砖时, 选择合适的工具非常重要(切槽镘刀、橡胶槌、 瓷砖垫片、橡胶镘刀、海绵等,以便在注浆时达到最佳效果)。 When installing tiles, it is extremely important that you choose suitable tools and instruments (notched trowel, rubber mallet, tile spacers, rubber trowel, and sponge for optimum results when grouting) .



2、你必须设计和创造合适的排水斜坡,以避免淤积问题和防止地表水积聚。

2, It is essential that you design and create suitable drainage slopes to avoid stagnation problems and prevent the build-up of surface water





3、确保地面防水,防止地面水分渗透,防止开花、苔藓等的形成。 3. Make sure that the ground is properly waterproofed to prevent ground moisture from filtering through and to protect against the formation of bloom,



4、基板在厚度和表面光洁度方面必须紧凑,任何易碎或容易脱落 的部件都应该被移除。基体还必须没有灰尘, 脂肪, 或任何其他 可能干扰附着力的物质。最后,确保表面完全均匀。在准备亚状 态时,必须维护之前创建的所有排水斜坡。

4. The substrate must be compact throughout in terms of thickness and surface finish, and any parts that are brittle or that could become easily detached should be removed. The substrate must also be free of dust, fat, or any other substances that could interfere with adhesion. Finally, make sure that the surface is completely even.All drainage slopes that you have previously created must be maintained when preparing the substate.







6、提前正确规划要铺瓷砖区域的布局。在规划布局时,要确定周 边和中间伸缩缝的位置,维护结构接缝,不要在这些接缝上安装 任何平头,以免在安装后出现破损或开裂。

 Correctly plan the layout of the area to be tiled in advance. When planning the layout, decide where to place perimeter and intermediate expansion joints, maintain structural joints, and do not install any tiler on these to prevent any breakage or cracking after installation.



7、在室外容易结霜的地方,必须覆盖好裂缝,并按照欧洲标准 EN 12004( 瓷砖用胶粘剂 ) 使用 y 级 C2 水泥基胶粘剂来安装室外 瓷砖。始终遵循制造商的指示,以享受胶粘剂的性能提供的好处。 7. In outdoor areas prone to frost, the crack must be covered wel and y class C2 cement-based adhesives as per European standard EN 12004(Adhesives for Ceramic Tiles) to install outdoor ceramic tiles. Follow the manufacturer's instructions at all times to enjoy the full benefits offered by the



8、使用薄层法用有缺口的抹刀涂抹所有粘合剂。确保你的泥刀的 大小与你要安装的瓷砖的大小相适应。对于户外大规格瓷砖,一 般采用浮贴法,即浮贴法。把粘合剂涂在衬底和瓷砖的底面上。

8. Apply all adhesives with a notched trowel using the thin-bed method. Make sure that the sizeof your trowel is suited to the sizeof the tiles you are installing. For outdoor ro large-format tiles, always use the floating and buttering method, i.e. spread the adhesive over both the substrate and the underside o



9、 使用适合室外使用的灌浆砂浆 (符合 EN 13888- 瓷砖灌浆材 料的 CG 2 级水泥基灌浆砂浆) 确保正确密封瓷砖接缝。对于需要 更大弹性、附着力和机械阻力的应用,我们建议将水泥基砂浆与 特殊到於混合添加剂。

Ensure that you seal tile joints properly by using a grouting mortar suited to outdoor use(Class CG 2 cementbased grouting mortars as per EN 13888 - Grouting Material for Ceramic Tiles) .For applications requiring greater elasticity, adhesion, and mechanical resistance, we recommend mixing your cementbased mortar with a special latex additive.



10、接缝的正确密封是铺砖过程中非常重要的一部分。室外的瓷 砖不应该拼接在一起。瓷砖之间应留有5毫米的接缝,尽管在温 度急剧变化的区域可能会增加。灌浆前要确保所有接头都是干净 §9. The correct sealing of joints is avery important part of the tiling process. Outdoor tiles should never be butted together. A joint of aleast 5 mm should be left between tiles although this can be increased in areas subject to sharp.



temperature changes. Make sure that alljoints are clean beforegrouting them. 11、在使用灌浆材料时,请确保遵循制造商的说明。如果你使用 的是防滑瓷砖或乳液型浆液,请确保在浆液变干前清除所有痕迹。

11. Make sure that your follow the manufacture's instructions when applying the grouting material. If you are using anti slip tiles or a latex-based grout,  $\,$  make sure you cleanaway all traces of grout before it has time to dry.



12、在所有情况下,考虑周边关节的创建。这些应该在地砖和垂 直元素(如墙、柱子、基础块或其他类型的地板)之间的所有过 渡处创建。周边接缝的最小宽度应为8毫米。

12. In all cases, consider the creation of perimeter joints These should be created at all transitions between floor tiles and vertical elements such as walls, pillars, foundation blocks, or other types of flooring.Perimeter joints should have a minimum width of 8 mm.



13、所有楼层结构接缝的宽度和深度必须严格遵守。移动接缝对 于保护瓷砖不受移动造成的损害至关重要,无论是建筑的正常移 动还是温度、湿度等变化引起的移动。

13. The width and depth of all floor structural joints must be strictly observed. Movement joints are critical to protecting ceramic tiles against damage caused by movements both normal building movements and movements caused by changes in temperature, moisture, etc.



14、当填充移动接缝时,不要使用吸收性、闭孔性、高压缩性或 耐高温灌浆材料。密封接缝与高度弹性,防水材料是适合的宽度 的接缝。这种密封胶还必须提供足够的机械和热阻。

14. When filling movement joints, do not use absorbent, closed-cell, high-compression, or temperature-resistant grouting materials. Seal joints with a highly elastic, waterproof material that is suited to the width of the joint. This ealant must also offer sufficient mechanical and thermal resistance.

15、中间伸缩接头必须在直径9米到25米之间的区域建造。这



些接缝应形成一个正方形, 每条边长不超过 5 米。尽管如此, 关 节宽度至少应保留8毫米。 15. Intermediate expansion joints must be created in areas measuring between 9 and 25 m². These joints should form a square with each side measuring no more than 5 m A joint width of atleast 8mm should be left although this.



16、瓷砖应经常在易结霜的室外区域使用(这些瓷砖的吸水率低 于 0.5%),在霜冻期间,不要让水在未灌浆的接缝处积聚,因为 循环的冻融会损坏瓷砖。

16. Porcelain tiles should always be used in outdoor areas prone to frost(these tiles have a water-absorption rate of under 0.5%) .Do not allow water to accumulate in un grouted joints during frost periods as freezing-thawing cycles could damage the tiles.



17、你可以通过选择防滑的瓷砖来提高潮湿地区的安全等级,因 为那里有滑动的风险。但是,请记住,这些瓷砖更难以清洁(它 们更容易受到灰尘堆积的影响,而灰尘通常更难以清除)。 17. It is absolutely necessary that already installed ceramic floor tiles be protected with the proper means so as to prevent possible damages until the building project is complete, due to the presence of abrasive materials and ongoing movement of tools. This will not only help to protect tiles, but it will also

make subsequent cleaning easier.



18、翻耕完成后,确保及时去除所有的灌浆和粘合剂,因为它们 与瓦片表面接触的时间越长,就越难去除。不要使用含有其他腐 蚀性物质的氢氯酸清洗剂。

18. When finished tilling, make sure that you remove all traces of grout and adhesive promptly as the longer that these are in contact with the tiled surface, the more difficult they are to remove. Do not use cleaning agents containing fluor hydric acid of any other aggressive materials.

- 143 -- 144 -